



PANEL5000-C215IW-T Touch Screen Monitor



21.5" Full HD Capacitive Touch Screen
Industrial Monitor



PANEL5000-C215IW-T




Specifications:

General	Control button	Set Contrast ratio and Luminance via OSD at the back panel
	Dimensions (W x H x D)	550mm x 342mm x 61mm (21.65" x 13.46" x 2.40")
	Drill Hole Size (W x H)	533mm x 325mm (20.98" x 12.80")
	Box structure	Front panel: aluminum-magnesium alloy, anodized coating ;Back cover: SGCC, Ground isolation protection
	Mounting	Support Embedded,wall-mounted,Desktop and VESA mounting
	Power Supply	DC 12V,support reverse polarity protection, optional DC 24V
	Power Dissipation	17W
	Signal input	VGA & DVI-D
	NW	-
LCD	LCD Size	21.5" Full HD TFT
	Resolution	1920 x 1080
	Colors	16.7MB
	Active Area (W x H)	476.64mm x 268.11mm (18.77"x 10.56")
	Backlight	LED
	MTBF	30000hrs
	Pixel Pitch(H x V)	0.248 x 0.248
	Luminance	250cd/m ²
	Contrast Ratio	3000 : 1
	Viewing Angle	(L) 89 / (R) 89 / (T) 89 / (B) 89
Touchscreen	Type	Multi-point capacitive touch screen
	Transmittance	> 75%
	Controller interface	USB
	Driver Support	Windows XP, Windows 7, Winows8, Windows 10, Linux
	Multi-touch	10 points (windows system)
	Surface Hardness	Mohs' Number 7
Environmental	Work Temperature	0 ~ 50° C (32~122 °F)
	Storage Temperature	-20 ~ 60° C (-4 ~ 140 °F)
	Relative humidity	5~95% (Non condensation)
	Shake	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock	SSD applied: 10 G, IEC 60068-2-64, Half-sine wave, 11ms duration
	EMC	CE/FCC Class A
	Water-proof	Front panel IP65


Touch Screen Monitor

Dimensions:

Unit : mm

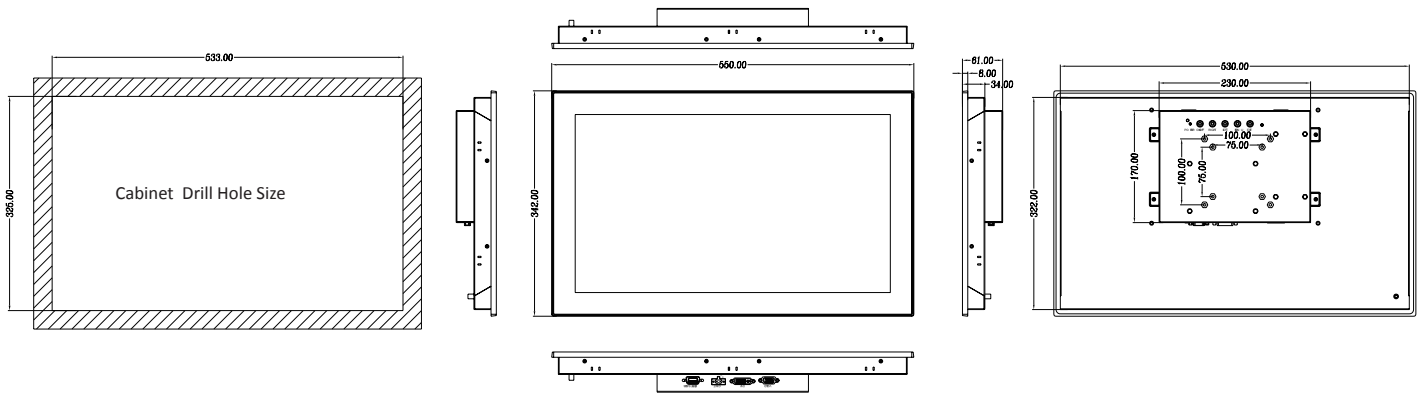

I/O:

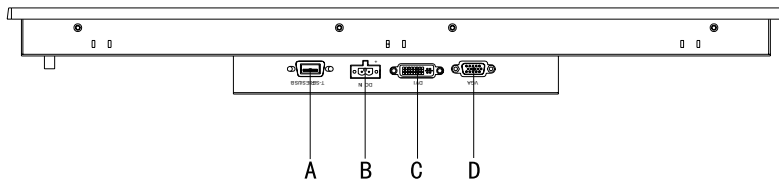

Interface Definition:

- A: USB port
- B: DC IN(12V)
- C: DVI port
- D: VGA port

Ordering Information:

Product Code	Description
PANEL5000-C2151W-T	21.5" TFT LCD/Capacitive Touch Screen/DC12V input/1920*1080
PANEL5000-C2151W-TW	21.5" TFT LCD/Capacitive Touch Screen/9~30V wide voltage input/1920*1080

Optional Equipment:

VGA Cable	3M/5M
DVI Cable	3M/5M
USB Cable	3M/5M
Power Line	3M/5M
HDMI turn DVI	3M/5M

Packing List:

Adapter	Adapter 12V/3.33A,40W 2pin Phoenix terminal
VGA Cable	1.8m
USB Cable	1.8m
Power Line	Chinese standard Power Line PSB-10+ST3
Hook	8*Hooks apply to Thickness=1mm~1.2mm