



TERA 2I392CW+L2L001

Compact Fanless Embedded Computer
with Intel® Apollo Lake Processor

Features:

- Intel® Apollo Lake CPU:
Atom™ E3950, Pentium® N4200, Celeron® N3350
- DDR3L SODIMM, Max. 8GB
- 2 x HDMI (OEM to DP)
- 7 x Intel GbE, 4 x USB 3.0
- Wide Range 9~36V DC input

Specifications :

Motherboard	2I392CW+L2L001	
CPU	Intel® Apollo Lake N4200 / N3350 / E3950	
Chipset	Intel® Apollo Lake SoC	
Memory	DDR3L SODIMM, Max. 8GB	
Storage	mSATA	
Expansion slots	1 x Full-size Mini PCIe (USB)	
	1 x Full-size Mini PCIe (USB / mSATA)	
I/O ports	Network	2 x Intel GbE
		5 x Intel GbE --- L2L001
	USB	4 x USB 3.0
	Serial ports	Optional
	Display	2 x HDMI (OEM to DP)
Optional Modules & Accessory	GPS, Bluetooth, PoE, WiFi, 4G LTE, Isolated COM, battery UPS, DI/DO, Video Input	
	*Wall Mount Kit * External Power Adapter	
OS Support	Windows® 10 IOT (64bit), Ubuntu 16.04.1 above, Fedora 25 above	

Mechanical

Dimensions	145W x 106.2D x 56.5H mm
Weight	0.9 kg
Mounting	Wall Mount*

Power

DC input	+9~36V
AC input	External AC / DC adapter 100 / 240V (Optional)


Environment

Operating Temp. (100 % CPU usage)	-20°C to +60°C with mSATA
Storage Temp.	-20°C to +70°C
Relative Humidity	95% @ 40°C, non-condensing

Certification

CE / FCC class A

Dimension

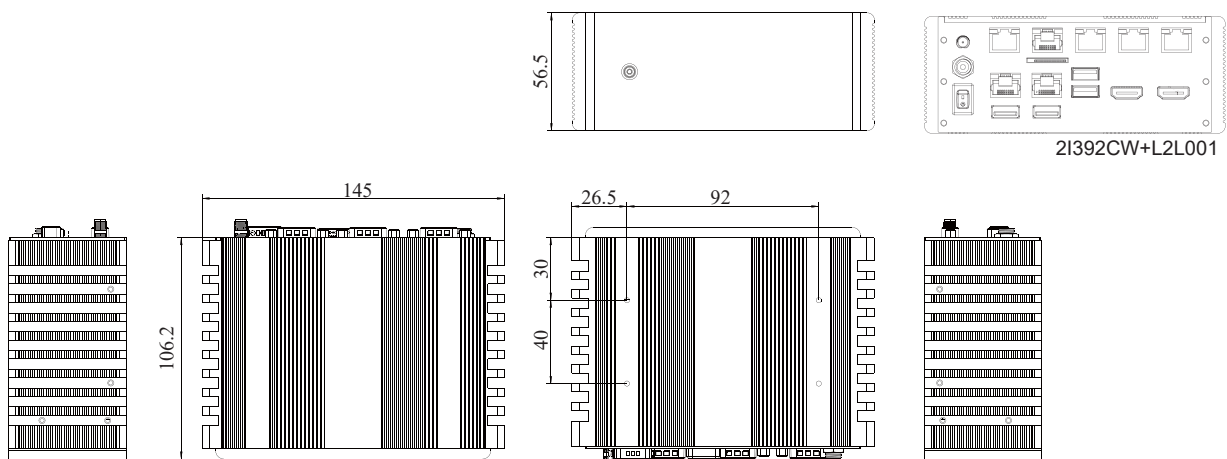

Specification are subject to change without prior notice. ODM / OEM is available.