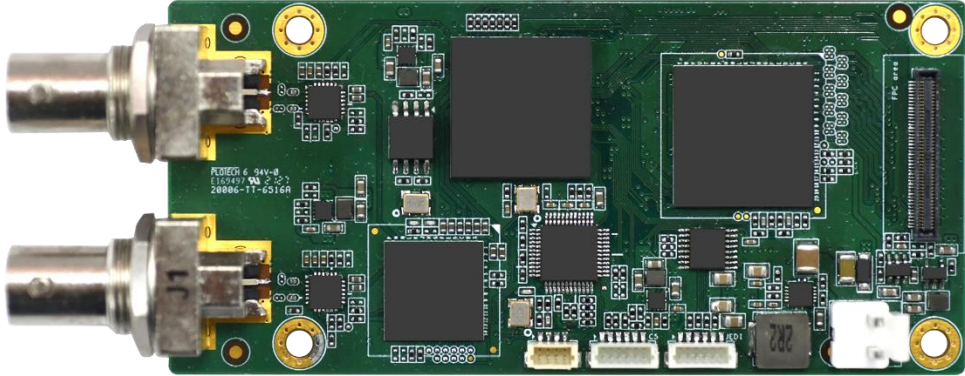


| SC740 Series Hardware Specification | |
|-------------------------------------|---|
| Model | SC740N2 MP 6G-SDI |
| Max. FPS | 3840x2160p@60/50fps in → 3840x2160p@60/50fps out |
| Recording Mode | Software Compression, Real-Time Mode |
| Product photo |  |
| Dimension | 45.5x97 (mm) MIPI |
| Interface | MIPI CSI-2, 4 Lane |
| Video Input | 1x12G-SDI or 2x6G-SDI |
| Display Video Format | UYVY, YUYV |
| Video RAW Data Resolution | <p>12G-SDI 3840x2160@60/50fps</p> <p>6G-SDI 3840x2160@30/25/24fps</p> <p>3G-SDI 1920x1080p@60/50fps</p> <p>HD-SDI 1920x1080p@30/25/24fps 1920x1080i@60/50fps 1280x720p@60/50fps</p> |

| | |
|-----------------------------------|--|
| | SD-SDI 720x480i@60fps 720x576i@50fps |
| Recording Video Format | H.264 (Software Compression) |
| Recording Video Resolution | 12G-SDI 3840x2160@60/50fps 6G-SDI 3840x2160@30/25/24fps 3G-SDI 1920x1080p@60/50fps HD-SDI 1920x1080p@30/25/24fps 1920x1080i@60/50fps 1280x720p@60/50fps SD-SDI 720x480i@60fps 720x576i@50fps |
| Audio Input | 2xSDI Embedded Audio |
| Audio Format | Stereo / 16-bit / 44100Hz, 48000Hz |
| Multiple Cards | ∞ |
| SDK | Support API : DirectShow, V4L2, FFmpeg, Gstreamer Support Language : C++, C#, .NET, Visual Basic, Qt, Delphi |

(株)連基 〒123-0852 東京都足立区関原2丁目42-8
お問い合わせ: info@cnct.world Phone: 03-5842-1785