


2I130DW


2.5" Plus Embedded SBC supports
 Intel® 13th Gen Raptor Lake-U i7 / i5 / i3, Celeron CPU
 Intel® 12th Gen Alder Lake-U i7 / i5 / i3, Celeron CPU
 1 x HDMI, 1 x eDP, 4 x Intel 2.5Gb Ethernet, 2 x M.2, 1 x Nano SIM
 4DI / 4DO, 3 x USB 3.0, 4 x USB 2.0, 2 x COM

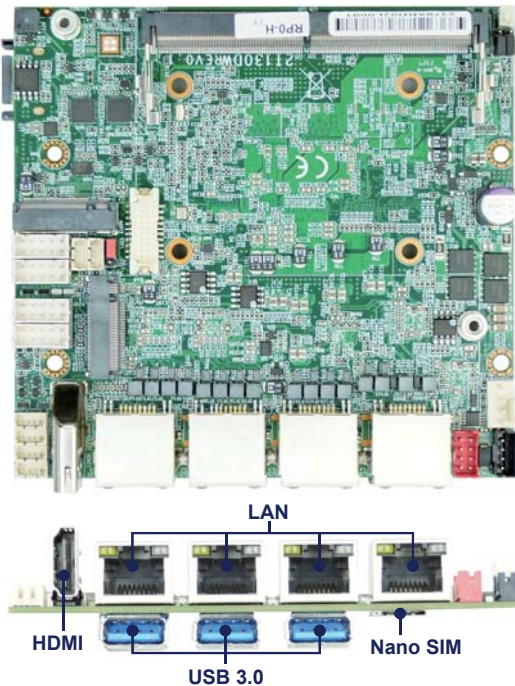

Features:

- Intel® 13th Gen Raptor Lake-U ;
Intel® 12th Gen Alder Lake-U i7 / i5 / i3, Celeron CPU
- 1 x DDR5 SODIMM (Max. 32GB)
- Multiple Independent display: HDMI, eDP
- 4 x Intel 2.5 GbE LAN, 3 x USB 3.0 (type A), 4 x USB 2.0
- 2 x COM, 4DI/4DO, *2 x M.2, 1 x Nano SIM
- TPM 2.0 (Firmware)

Dimensions: (Unit:mm)

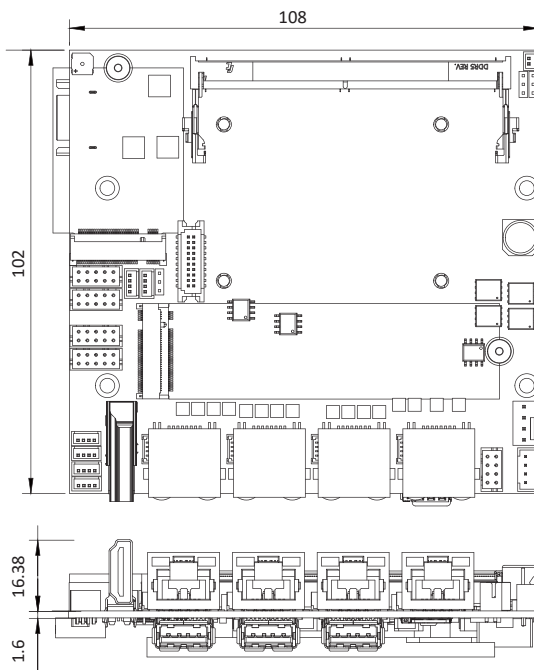

Specifications :

- CPU
Intel® 13th Gen Raptor Lake-U i7 / i5 / i3, Celeron CPU
Intel® 12th Gen Alder Lake-U i7 / i5 / i3, Celeron CPU
- MB Chipset
Intel® Raptor Lak / Alder Lake SoC
- Graphics
Intel UHD Graphics
- System Memory
1 x DDR5 5200 / 4800 MHz SODIMM, Max 32GB
- Storage
1 x SATA ports 3.0 Data transfer rates up to 6.0 Gb/s (600 MB/s)
1 x M.2 M key Type 2280 (PCIe x4), Support NVMe
1 x M.2 B key Type 3042 (PCIe x2)
- BIOS
AMI UEFI BIOS
- Display
1 x HDMI, 1 x eDP
- TPM
TPM 2.0 (Firmware) ; OEM Optional to Hardware TPM 2.0
- LAN
4 x Intel 2.5GbE I226 (external)
- Expansion Interface
1 x M.2 M key Type 2280 (mSATA / PCIe x4), Support NVMe
1 x M.2 B key Type 3042 (PCIe x2 / USB 3.2 / 2.0), 1 x Nano SIM

Expansion Options

CN064	M.2 B key 2242 to M.2 E Key 2230, WiFi 6 + BT
CN067	M.2 B key 2242 to M.2 B Key 2252, 4G / 5G (3.7V by BOM Control)
CN059	USB to Line-out / Mic- in
CC007	USB to 4 port COM
CIO116G	SMBus to 8DI + 8DO
PW351	1 port PoE PSE
PW352	2 port PoE PSE
PW301	802.3AF / AT PD module
PW205	Wide Range power board (9~36V) with power Ignition on/off delay
PW206	12V / 24V DC to DC Redundant Power Board
PW022	Wide Range power board (24V / 48V)
DP001	eDP to VGA
eDP003	eDP to DVI
eDP004	eDP to HDMI
eDP001	eDP to LVDS (OEM)

- USB
3 x USB 3.0 (Type A-external)
4 x USB 2.0 (internal)
- Serial IO
2 x RS232 / 422 / 485 (internal)
*COM1, COM2 pin9 5V / 12V (Option)
- GPIO
Hardware digital Input & Output, 4 x DI / 4 x DO
- SMBus / I²C
1 x SMBus / I²C
- WDT
Hardware Watch Dog Timer, 0~255 sec programmable
- Power Input
Wide Range DC IN +9~36V
- Dimension
2.5" Plus (108 x 102 mm)
- Operation Temperature (100% CPU Usage)
-20°C~70°C (100% CPU Usage, not-underclocking)
- Operation Humidity
5~95%, non-condensing
- Chassis (OEM I/O Expansion by request)
SKY 2, TERA
- OS Support
Windows® 10 IOT ; Windows® 11 IOT
Ubuntu 22.04 above, Fedora 36 above