



PANEL5000-CI85IW-T Touch Screen Monitor



18.5" HD Capacitive Touch Screen
Industrial Monitor



PANEL5000-CI85IW-T




Specifications:

General	Control button	Set Contrast ratio and Luminance via OSD at the back panel
	Dimensions (W x H x D)	480mm x 304mm x 60mm (18.90" x 11.97" x 2.36")
	Drill Hole Size (W x H)	463mm x 287mm (18.23" x 11.30")
	Box structure	Front panel: aluminum-magnesium alloy, anodized coating ;Back cover: SGCC, Ground isolation protection
	Mounting	Support Embedded,wall-mounted,Desktop and VESA mounting
	Power Supply	DC 12V,support reverse polarity protection, optional DC 24V
	Power Dissipation	10W
	Signal input	VGA & DVI-D
	NW	-
LCD	LCD Size	18.5" HD TFT
	Resolution	1366 x 768
	Colors	16.7MB
	Active Area (W x H)	409.8mm x 230.4mm (16.13"x 9.07")
	Backlight	LED
	MTBF	30000hrs
	Pixel Pitch(H x V)	0.300 x 0.300
	Luminance	250cd/m ²
	Contrast Ratio	1000 : 1
	Viewing Angle	(L) 85 / (R) 85 / (T) 80 / (B) 80
Touchscreen	Type	Multi-point capacitive touch screen
	Transmittance	> 75%
	Controller interface	USB
	Driver Support	Windows XP, Windows 7, Winows8, Windows 10, Linux
	Multi-touch	10 points (windows system)
	Surface Hardness	Mohs' Number 7
Environmental	Work Temperature	0 ~ 50° C (32~122 °F)
	Storage Temperature	-20 ~ 60° C (-4 ~ 140 °F)
	Relative humidity	5~95% (Non condensation)
	Shake	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock	SSD applied: 10 G, IEC 60068-2-64, Half-sine wave, 11ms duration
	EMC	CE/FCC Class A
	Water-proof	Front panel IP65


Touch Screen Monitor

Dimensions:

Unit : mm

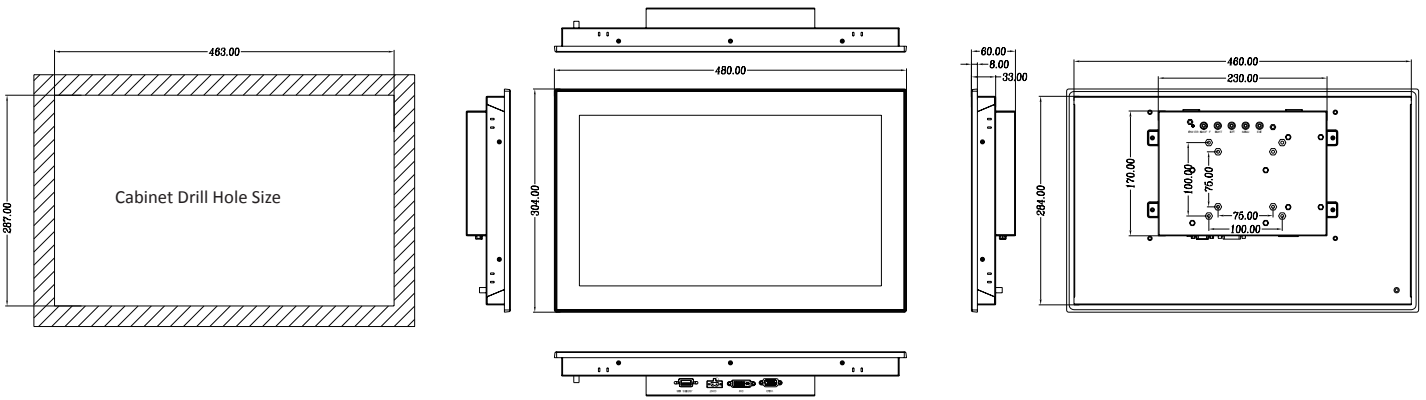

I/O:

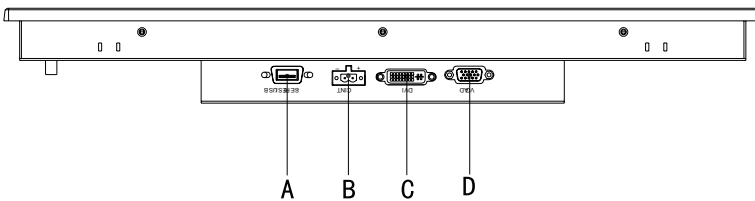

Interface Definition:

- A:USB port
- B:DC IN(12V)
- C:DVI port
- D:VGA port

Ordering Information:

Product Code	Description
PANEL5000-C1851W-T	18.5" TFT LCD/Capacitive Touch Screen/DC12V input/1366*768
PANEL5000-C1851W-TW	18.5" TFT LCD/Capacitive Touch Screen/9~30V wide voltage input/1366*768

Optional Equipment:

VGA Cable	3M/5M
DVI Cable	3M/5M
USB Cable	3M/5M
Power Line	3M/5M
HDMI turn DVI	3M/5M

Packing List:

Adapter	Adapter 12V/3.33A,40W 2pin Phoenix terminal
VGA Cable	1.8m
USB Cable	1.8m
Power Line	Chinese standard Power Line PSB-10+ST3
Hook	8*Hooks apply to Thickness=1mm~1.2mm