
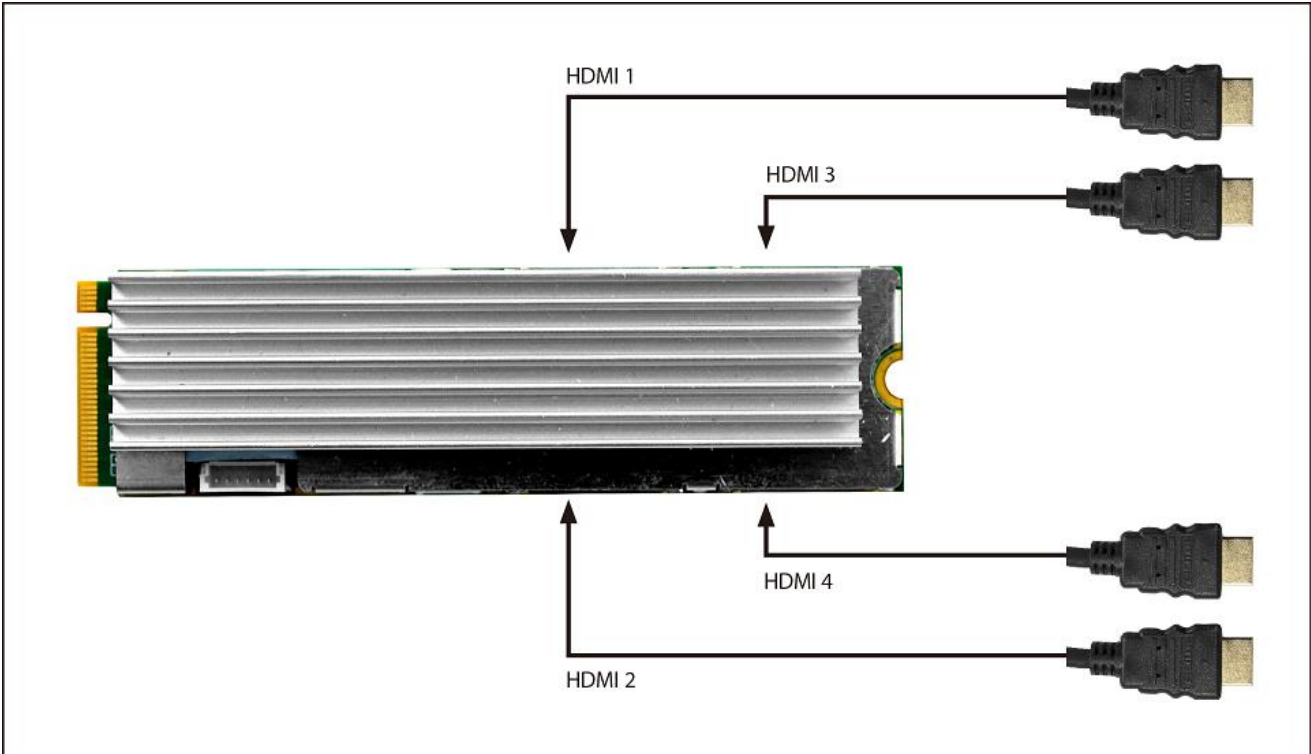


SC400 Series Hardware Specification	
Model	SC400N4 M2 HDMI
Max. FPS	1920×1080p@60/50fps in → 1920×1080p@60/50fps out
Recording Mode	Software Compression, Real-Time Mode
Product photo	
Dimension	22×80 (mm) M.2 Type M
Interface	M.2 (PCIe×4)
Video Input	4×HDMI
Display Video Format	YV12, NV12, YUY2, RGB24, RGB32, P010
Video RAW Data Resolution	1920×1080p@60/50fps 1920×1080p@30/25/24fps 1920×1080i@60/50fps 1280×720p@60/50fps 1280×1024p@60fps 1280×960p@60fps 1024×768p@60fps 800×600p@60fps 640×480p@60fps 720×480p@60fps 720×576p@50fps 720×480i@60fps 720×576i@50fps
Recording Video Format	H.264 (Software Compression)
Recording Video Resolution	1920×1080p@60/50fps 1920×1080p@30/25/24fps 1920×1080i@60/50fps 1280×720p@60/50fps 1280×1024p@60fps 1280×960p@60fps

	1024x768p@60fps 800x600p@60fps 640x480p@60fps 720x480p@60fps 720x576p@50fps 720x480i@60fps 720x576i@50fps
Audio Input	4xHDMI Embedded Audio
Audio Format	Stereo / 16-bit / 32000 ~ 48000Hz
Multiple Cards	∞
SDK	Support API : DirectShow, V4L2, FFmpeg, Gstreamer Support Language : C++, C#, .NET, Visual Basic, Qt, Delphi
System Requirement	
OS Support	Windows 7 / Windows 8 / Windows 8.1 / Windows 10 / Windows 11 Linux 4.8 or Higher (32-bit and 64-bit)
Connection Diagram	
 <p>The diagram illustrates the connection points for four HDMI ports on a device. The device is shown as a long, thin, silver-colored component with a green PCB edge on the left. Four HDMI cables are connected to the device: HDMI 1 is at the top left, HDMI 3 is at the top right, HDMI 2 is at the bottom left, and HDMI 4 is at the bottom right. Each cable has a black plastic connector with gold-plated pins.</p>	